


FIXAÇÕES PT-H

PT-H FIXING made of polypropylene with fibre glass reinforced polypropylene nail, for the mechanical affixing of all types of thermal and acoustic insulation to walls, roofs, on any construction support

ADVANTAGES

- With expanding nail that ensures fixing
- Quick and easy installation
- Different pin lengths with the same diameter

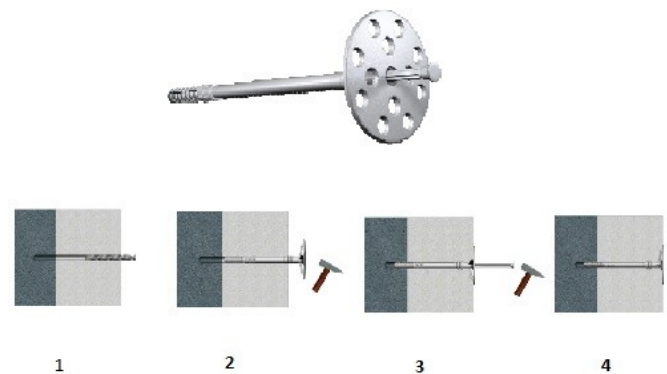

APPLICATION

- Choose the length of the fixing according to the thickness of the insulation (see table)
- Drill a hole that is 10 mm with the depth according to the table.
- Place fixing in the drilled hole and use a hammer to pound the washer and once positioned, pound the fastener until firm

Auxiliary Acoustic Insulation

TEXSA SYSTEMS SLU reserves the right to modify the information contained herein without prior notice and declines all liability in cases of errors produced due to inappropriate use of the product. The values shown in the technical sheet are the mean values from tests in our lab.

INSTALLATION

*Acceptable supports:

- (A) Standardized C12/15 - C16/20 – C50/60 concrete according to EN 206-1
- (B) Solid brick min 20 MPa according to EN 771-1
- (B) Solid silico-calcareous brick min 20 MPa according to DIN 106 (EN 771-2)
- (C) Hollow silico-calcareous brick min 12 MPa according to DIN 106 (EN 771-2)
- (C) Perforated ceramic brick min 12 MPa according to DIN 105 (EN 771-1)
- (D) Hollow light-weight concrete block min 2 MPa according to DIN 18151 (EN 771-3)
- (D) Solid light-weight concrete block min 20 MPa according to EN 771-3
- (E) Autoclaved aerated concrete block min 2 MPa according to EN 771-4

Auxiliary Acoustic Insulation

TEXSA SYSTEMS SLU reserves the right to modify the information contained herein without prior notice and declines all liability in cases of errors produced due to inappropriate use of the product. The values shown in the technical sheet are the mean values from tests in our lab.

PACKAGING AND STORAGE

| PRODUCT | Diameter (mm) | Length (mm) | Plate diameter (mm) | Packaging |
|-----------------|---------------|-------------|---------------------|------------------|
| FIXING PT-H 70 | 100 | 70 | 60 | Box of 250 units |
| FIXING PT-H 90 | 100 | 90 | 60 | Box of 250 units |
| FIXING PT-H 120 | 100 | 120 | 60 | Box of 250 units |

TECHNICAL PROPERTIES

| SUBSTRATE | Admissible Load |
|--------------------------------|-----------------|
| Normal weight Concrete C 12/15 | 0,50 kN |
| Normal weight Concrete C 16/20 | 0,60 kN |
| Solid brick min 20 MPa | 0,50 kN |

Auxiliary Acoustic Insulation

TEXSA SYSTEMS SLU reserves the right to modify the information contained herein without prior notice and declines all liability in cases of errors produced due to inappropriate use of the product. The values shown in the technical sheet are the mean values from tests in our lab.